

# (1) Type Examination Certificate

(2) No. of the Type Examination Certificate: **ZP/B171/22**

(3) Product: **Fall-through protection**  
Type: **LIGHT**

(4) Manufacturer: **INNOTECH Arbeitsschutz GmbH**

(5) Address: **Laizing 10**  
**A-4656 Kirchham**  
**Österreich**

(6) The design of this product and any acceptable variation thereto are specified in the schedule to this Type Examination Certificate.

(7) The certification body of DEKRA Testing and Certification GmbH certifies that this product complies with the fundamental requirements of the standard listed under item 8 below. The examination and test results are set out in the report PB 22-193.

(8) The requirements of the standard are assured by compliance with

**GS-Bau-18 Edition 2020**


(9) This Type Examination Certificate relates only to the design, examination and tests of the specified product in accordance to the standard list. Further requirements of the Directive apply to the manufacturing process and supply of this personal protective equipment. These are not covered by this certificate.

(10) This Type Test Certificate is valid until 2027-11-29.

DEKRA Testing and Certification GmbH  
Bochum, 2022-11-30

signed: Krökel  
Managing director

We confirm the correctness of the translation from the German original.  
In the case of arbitration only the German wording shall be valid and binding.

  
Managing director

## TRANSLATION

- (11) Appendix to
- (12) **Type Examination Certificate**  
**ZP/B171/22**
- (13) 13.1 Subject and Type  
Fall-through protection  
Type: LIGHT

### 13.2 Description

The fall-through protection of type LIGHT (Fig. 1-2) is used to secure people against falls from a height through skylights. The system is particularly intended to arrest one person if he falls through an existing roof opening such as skylights and rooflights. In addition, the person may be rescued by another person. The fall-through protection is mounted to suitable substructures of sufficient strength at the roof opening, using the fastening elements specifically provided for the respective substructure.

The fall-through protection consists of a galvanized, cold-rolled steel plate ( $t = 1.5 \text{ mm}$ )

The dimensions of the fall-through protection can vary, but the minimum dimensions are to be 1000 mm x 500 mm.

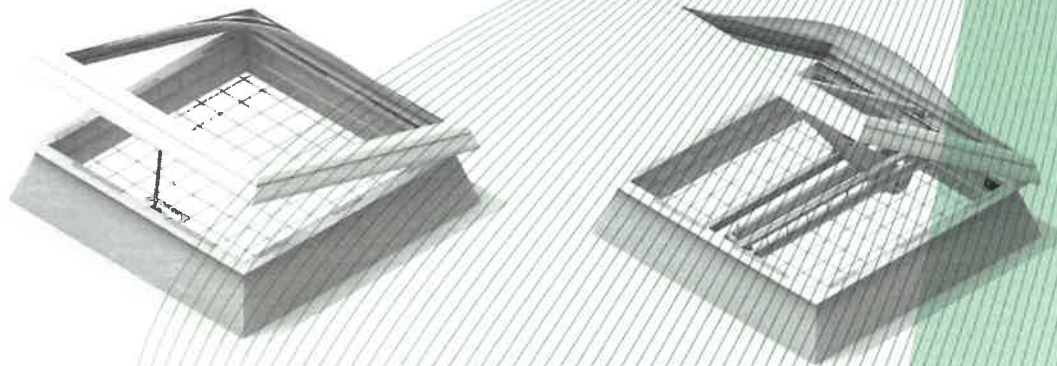


Fig. 1-2: Fall-through protection, type: LIGHT

- (14) Report  
PB 22-193, 2022-11-30