

(1) Type Examination Certificate

(2) No. of the Type Examination Certificate: **ZP/B038/22** replaces ZP/B069/16

(3) Product: **Anchor device type A**
Type: **SYST-20**

(4) Manufacturer: **INNOTECH Arbeitsschutz GmbH**

(5) Address: **Laizing 10, 4656 Kirchham, Austria**

(6) The design of this product and any acceptable variation thereto are specified in the schedule to this Type Examination Certificate.

(7) The certification body of DEKRA Testing and Certification GmbH certifies that this product complies with the fundamental requirements of the standard listed under item 8 below. The examination and test results are set out in the report PB 22-048.

(8) The requirements of the standard are assured by compliance with

DIN EN 795:2012

DIN CEN/TS 16415:2017

(9) This Type Examination Certificate relates only to the design, examination and tests of the specified product in accordance to the standard list. Further requirements of the Directive apply to the manufacturing process and supply of this personal protective equipment. These are not covered by this certificate.

(10) This Type Test Certificate is valid until 2027-02-23.

DEKRA Testing and Certification GmbH
Bochum, 2022-02-24

signed: Kilisch
Managing director

We confirm the correctness of the translation from the German original.
In the case of arbitration only the German wording shall be valid and binding.


Managing director

TRANSLATION

- (11) Appendix to
- (12) **Type Examination Certificate**
ZP/B038/22
- (13) 13.1 Subject and Type
Anchor device type A
Type: SYST-20

13.2 Description

The anchor device of type SYST-20 is used to protect a maximum of three people against falls from a height; it is intended to be mounted on trapezoidal roof profiles (steel/aluminium $\geq t = 0.5$ mm) of sufficient strength.

The anchor device is fastened to the raised beads of the roof profile by two-part clamping rails made of stainless steel (1.4301) which are connected to the structure by means of rivets (BULB TITE with gasket (6.3 x 20.2 mm, aluminium). On one side, those clamping rails are adjusted to the contours of the raised beads of the roof.

The base plate of the anchor device is made of aluminium and is screw-fastened with the two clamping rails riveted onto the roof. Centrally on the base plate, there is a drill hole to which an attachment eyelet is securely screw-fastened. The user can connect his personal protective equipment to the attachment eyelet to protect himself against falls from a height.

Instead of the attachment eyelet, it is also possible to mount anchor line components for wire-rope systems of type ALLinONE (type C anchor device according to EN 795:2012) made by INNOTECH Arbeitsschutz GmbH. Thus, the anchor device of type SYST-20 can be used as end anchors and intermediate structural anchors in the system type ALLinONE.

The anchor device is made of corrosion-resistant materials and intended for bearing loads exerted from any direction parallel to the structure surface.

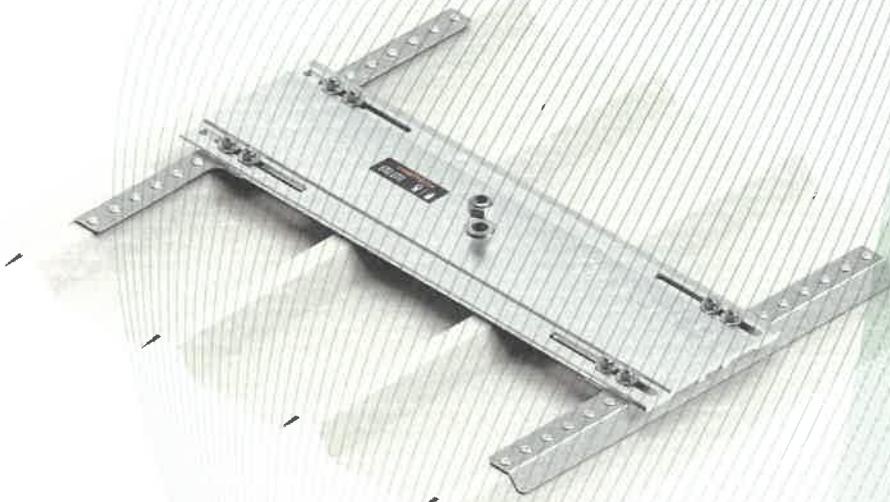


Fig. 1: Anchor device type A, type SYST-20

- (14) Report

PB 22-048, 2022-02-24