










Personal protective equipment **STRING** EN

The personal protective equipment **STRING** by INNOTECH is a high-quality base harness that can be extended in many ways and is therefore used in numerous applications.

With its low weight it guarantees an extremely high wearing comfort for the user and maximum safety due to automatic buckles.

-  variously useable base strap which can be extended with modular systems (STRING-2 / -4)
-  useable as safety harness, restraint- or positioning system
-  low weight
-  easily applied with maximum safety due to automatic buckles
-  additional insertion buckle in the chest area ensures high safety
-  certified according to:

EN 361  
EN 354

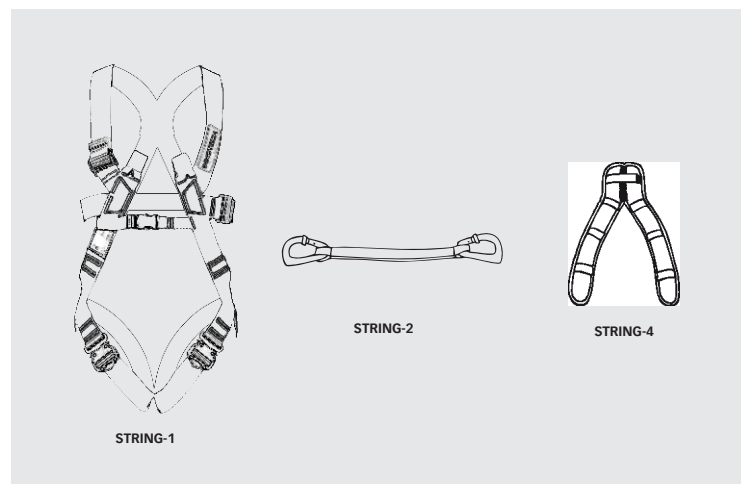

**STRING-1:**  
extendible safety harness (1kg) with automatic buckles in a carry pouch (max. Nennlast: 130 kg)

**STRING-2:**  
Extension for PSA-STRING-1, length 470 mm

**STRING-4:**  
Detachable shoulder pad for additional comfort while wearing the safety harness PSA-STRING-1

## PSA SET-BASIC


### PSA-STRING-1 SAFETY HARNESS (EN 361)

Size: ONE SIZE  
Max. rated load: 130 kg  
expandable base strap (1kg)  
with automatic fasteners in the carry pouch



### PSA-BRAKE-10 KERNMANTLE ROPE (Ø 12 mm) with a guided type fall arrester (EN 353-2 / EN 354 / EN 795)


Length 10 m (EN 353-2 / EN 358 / EN 795)



### PSA-KARI-1 TRIPLE-LOCK CARABINER, aluminium (EN 362)

Material: aluminium  
Load capacity: 22 kN

Closes automatically!



## PSA SET-ROOF

### PSA-STRING-1 SAFETY HARNESS (EN 361)

Size: ONE SIZE  
Max. rated load: 130 kg  
expandable base strap (1kg)  
with automatic fasteners in the carry pouch




### PSA-STRING-2 LANYARD (EN 354)

Length: 470 mm  
Extension for PSA-STRING-1



### PSA-BRAKE-10 KERNMANTLE ROPE (Ø 12 mm) with a guided type fall arrester (EN 353-2 / EN 354 / EN 795)


Length 10 m (EN 353-2 / EN 358 / EN 795)



### PSA-TAPE-80 TAPE SLING (EN 354 / EN 566 / EN 795)

Material: polyester (PES)  
Dimensions: 25 x 2 mm  
Lengths: 0,6 / 0,8 / 1,2 / 1,5 / 2,0 m  
Load capacity: 22 kN


Useable as anchorage point (EN 795)  
Suitable for mountaineering (EN 566)  
Can be used as a lanyard (EN 354)



### PSA-KARI-1 TRIPLE-LOCK CARABINER, aluminium (EN 362)

Material: aluminium  
Load capacity: 22 kN

Closes automatically!



### KA-TL-10-362-A2 (2x) TRIPLE-LOCK CARABINER, stainless steel (EN 362)

Material: stainless steel (AISI 304)  
Load capacity: 22 kN  
Replacement carabiner for AIO-GLEIT-10 / -13

Closes automatically!

